


1:Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Insulation Resistance: DC 300V 0.01S 10MΩ Min
- C. Conductive Resistance: 5Ω Max
- D. Pass Fluke ISO11801 Channel Class I test.(Random test.)
- E.RoHS 2.0 Compliant,REACH Compliant.

2:Packing :

1PCS/ bag+Label;5PCS/ bag+Label;
inner box +outer container+4PCS Label.

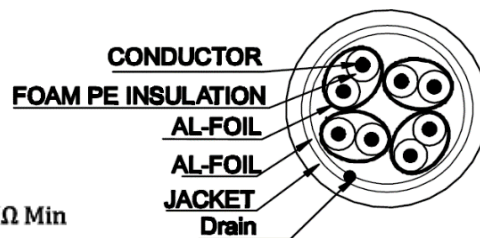

PIN OUT


P1	P2
1	1 WHITE
2	2 ORANGE
3	3 WHITE
6	6 GREEN
5	5 WHITE
4	4 BLUE
7	7 WHITE
8	8 BROWN
SHELL	SHELL

Note: (Colour Codes)

Blue	RAL 5005
Yellow	RAL 1003
Red	RAL 3020
Green	RAL 6024
White	RAL 9003
Black	RAL 9005
Grey	RAL 7044 (standard)



PACKING DRAW

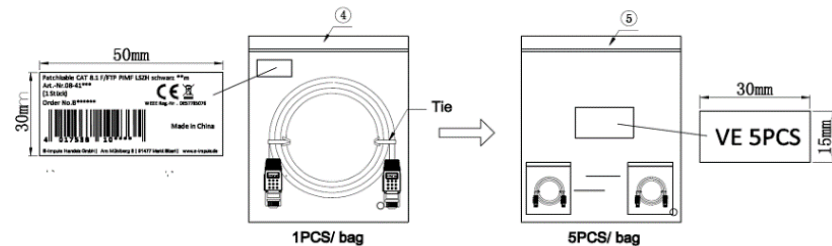

MATERIAL LIST

No.	PART NAME	DESCRIPTION	QTY
⑤	ACKAGE	PE BAG	1/5
④	ACKAGE	PE BAG	1
③	SHEATH	BLACK PVC	2
②	CONNECTOR	RJ45 PLUG, BLACK, SHIELD, GOLD FLASH PIN 3u",GOLD PLATED SHELL	2
①	CABLE	[(7*0.16BC+FM-PE)*1P+AL]*4PCS+D(7/0.12BC)+AL+ JACKET BLACK LSZH OD:6.3±0.2mm PRINTING : CATEGORY 8 - 2000MHz F/FTP PIMF PATCHCABLE LSZH	L



DESCRIPTION

CAT 8 F/FTP PATCHCABLE PIMF LSZH AWG26

SIZE	A4	DATE		CHECKED		TOL	
UNIT	MM	DRAWN		APPROVED			
CUSTOM TARIF NO.: 85444210000							

08-41005