
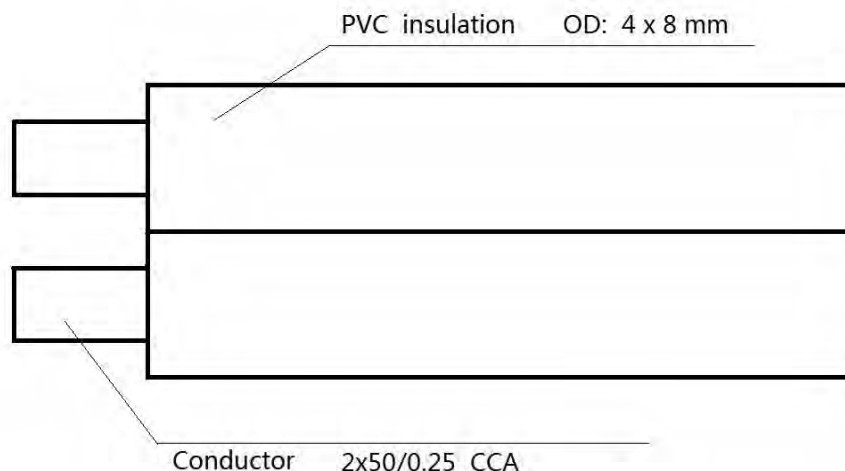
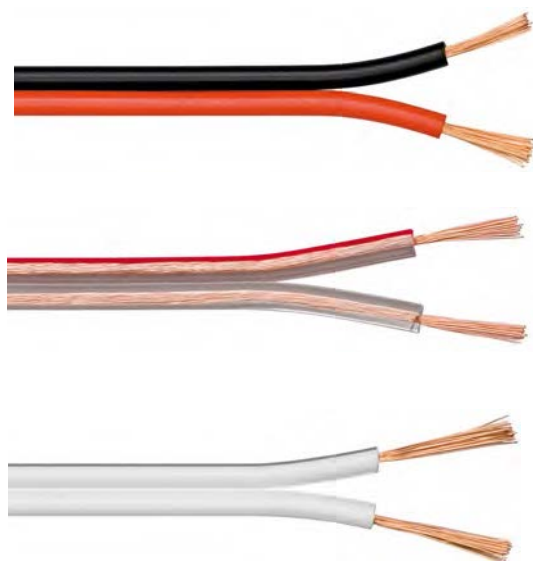


Product	Name	Speaker Cable				
Conductor	Material	Copper Coated Aluminum			Electrical Characteristics (20℃)	Max.Conductor DC Resistan at 20℃ (Ω/M) 0.012
	Nom.O.D. (mm)	2x50/0.25 (2x2.5mm ²)	Up	+0.02		Rated Voltage (V) ≤36
			Down	-0.02		
Jacket	External O.D.	4mm×2c	Up	+0.05	Sheath Physical Properties	Rated Temperature(℃) 70℃
			Down	-0.05		
	Surface	Smooth			View	
	Material	PVC(complies RoHS Reach) CPR(Eca)			Drawn By	
Page						

no.	Packaging	Length (m)	color
67723	Cable coil	10	transparent
67724	Cable coil	25	transparent
52082	Cable coil	50	transparent
15020	Cable Reel	100	transparent
67750	Cable coil	10	white
67751	Cable coil	25	white
67752	Cable coil	50	white
27525	Cable Reel	100	white
67735	Cable coil	10	red/black
67736	Cable coil	25	red/black
67737	Cable coil	50	red/black
15024	Cable Reel	100	red/black

Eca Fire class (CPR) according to DIN EN 13501-6

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	12.08.2021	TL		
12.08.2021	TL	gepr.:			LSK 2x2,5mm ² 	1/1
		Norm:				Zeichnungs-Nr.: 27525 15020 15024 67752 52082 67737 67751 67724 67736 67750 67723 67735
		Änderungen vorbehalten / <i>Subject to change</i>				

