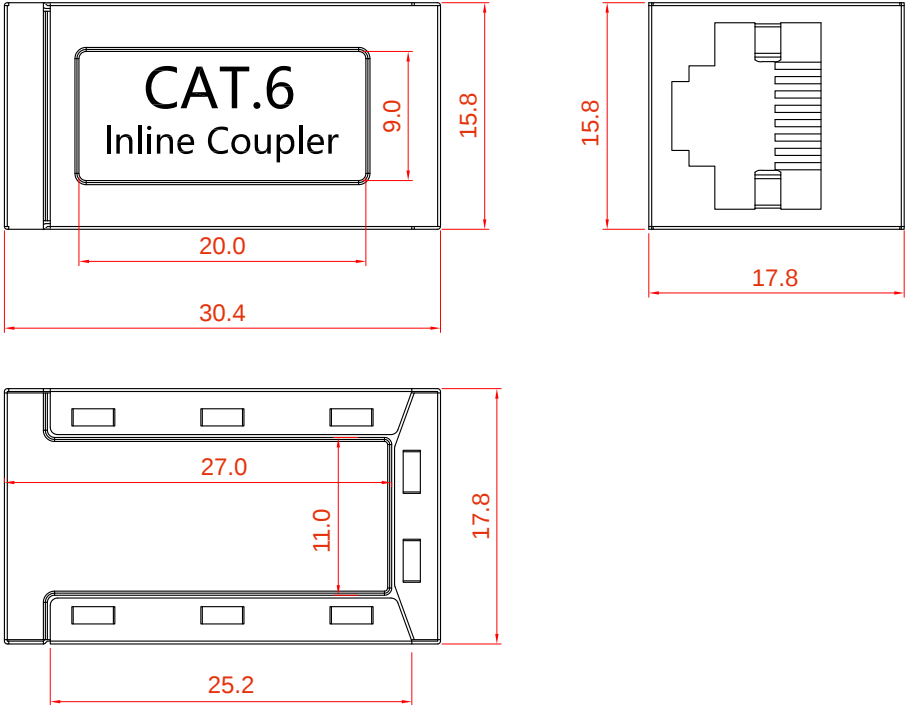


	1	2	3	4	5	6	7	8	9	10	11	12	13	14				
A								RJ45 Modularkupplung/Verbinder, CAT 6 - zur Verlängerung und Verbindung von 2x Netzkabeln mit RJ45-Steckern - mit echter Metallabschirmung (kein bedampfter Kunststoff) - 1:1 Belegung für CAT-6-Netzkabel - RJ45-Buchsen sind für PoE+ nach IEEE 802.3at geeignet - mit Platinenkontaktierung für die optimale Übertragung von elektrischen oder optischen Signalen Anschluss: 2 RJ45-Buchse (8P8C) Spezifikation: CAT 6 Bandbreite: 250 MHz Nennspannung: 125 V ~ RMS Nennstrom: 1,5 A Kontaktwiderstand: 1000 mΩ min @500 V === Durchschlagfestigkeit: 750 V ~ RMS 60 Hz, 1 min. Material Gehäuse: ABS Material Kontakte: Phosphorbronze Lagerungstemperatur: -40 °C ~ +85 °C Betriebstemperatur: 0 °C ~ +70 °C Gewicht: 8,9 g							A			
B															B			
C															C			
D															D			
E								RJ45 Modular Coupler, CAT 6 - for extension and connection of 2x network cables with RJ45 plugs - with real metal housing/cover (instead of metalised plastic) - 1:1 assignment for CAT 6 network cable - RJ45 sockets are suitable for PoE+ nach IEEE 802.3 at - with PCB board for a perfect transmission of electrical or optical signals Connectors: 2x RJ45 female (8P8C) Specification: CAT 6 Bandwidth: 250 MHz Voltage rating: 125 V ~ RMS Current rating: 1.5 A Contact resistance: 1000 mΩ min @500 V === Dielectric strength: 750 V ~ RMS 60 Hz, 1 min. Material housing: ABS Material contacts: phosphor bronze Storage temperature: -40 °C ~ +85 °C Operating temperature: 0 °C ~ +70 °C Weight: 8.9 g							E			
F															F			
G															G			
H															H			
I	Änderungen				Datum	Name		Bezeichnung						Blatt		I		
J	Datum	Name		gez.:	02.03.2023	ir		NET MODULAR KUPPLUNG CAT 6						1/1		J		
				gepr.:	02.03.2023	aw		2xRJ45 female 1:1 LC						von				
				Norm:				Zeichnungs-Nr.:										
				Änderungen vorbehalten / Subject to change				15217										
	1	2	3	4	5	6	7	8	9	10	11	12	13	14				