
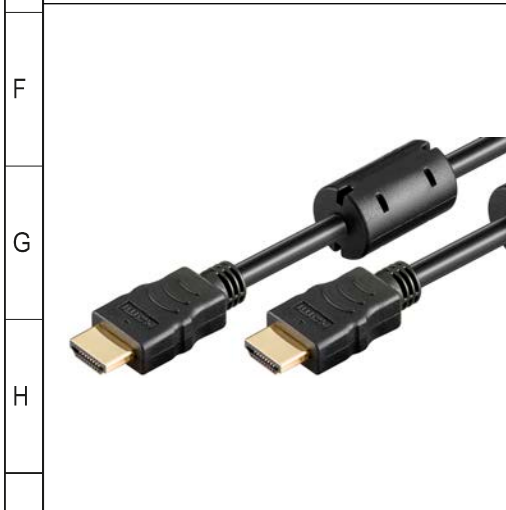
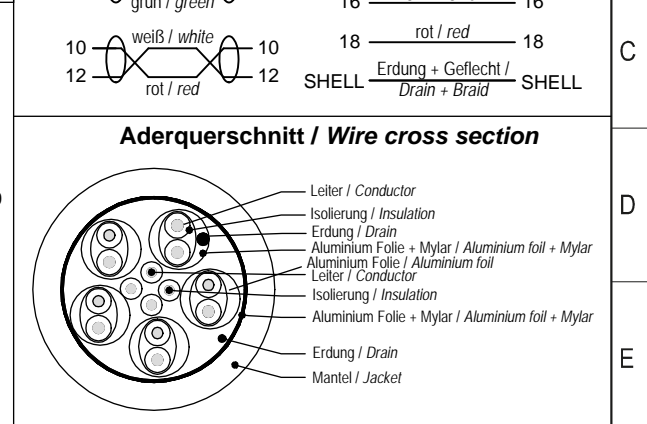


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|---|---------------------|---|--------------------|--|---|----------------------------------|---|---|----|-------------------------------|----|----|----|
| A | Art.-Nr. / Item No. | Beschreibung / Description | Länge / Length (L) | Kontaktwiderstand / Contact resistance | Max. Übertragungsrate / Max. data transmission rate | AD Kabelmantel / OD cable jacket | Kabeldurchmesser / Cable diameter | | | Pin-Belegung / Pin Assignment | | | |
| B | 61299 | HDMI 2.0 Kabel Ferrite 0100 1,0m (15+1) sw | 1000 ± 20 mm | 5 Ω max. | 18 Gbit/s | 5.5 ± 0.2 mm | 30AWG (1/0.254CCS) * 1P + AL) * 4P + (1/0.254CCS) * 1P + E + AM) * 1P + 30# (1/0.254CCS) * 4C + D (1/.0254CCS) + AL | | | | | | |
| B | 61300 | HDMI 2.0 Kabel Ferrite 0150 1,5m (15+1) sw | 1500 ± 30 mm | 5 Ω max. | 18 Gbit/s | 5.5 ± 0.2 mm | | | | | | | |
| B | 61301 | HDMI 2.0 Kabel Ferrite 0200 2,0m (15+1) sw | 2000 ± 30 mm | 5 Ω max. | 18 Gbit/s | 5.5 ± 0.2 mm | | | | | | | |
| B | 61302 | HDMI 2.0 Kabel Ferrite 0300 3,0m (15+1) sw | 3000 ± 50 mm | 10 Ω max. | 18 Gbit/s | 5.5 ± 0.2 mm | | | | | | | |
| B | 61303 | HDMI 2.0 Kabel Ferrite 0500 5,0m (15+1) sw | 5000 ± 100 mm | 10 Ω max. | 10.2 Gbit/s | 5.5 ± 0.2 mm | 26AWG (1/0.40CCS) * 1P+AM) * 4P + (1/0.40CCS) * 1P + E + AM) * 1P + 30# (1/0.254CCS) + 4C + D (1/0.254CCS) + AL | | | | | | |
| B | 61304 | HDMI 2.0 Kabel Ferrite 1000 10,0m (15+1) sw | 10000 ± 200 mm | 20 Ω max. | 10.2 Gbit/s | 5.5 ± 0.2 mm | | | | | | | |
| C | 61305 | HDMI 2.0 Kabel Ferrite 1500 15,0m (15+1) sw | 15000 ± 300 mm | 30 Ω max. | 10.2 Gbit/s | 7 ± 0.2 mm | | | | | | | |

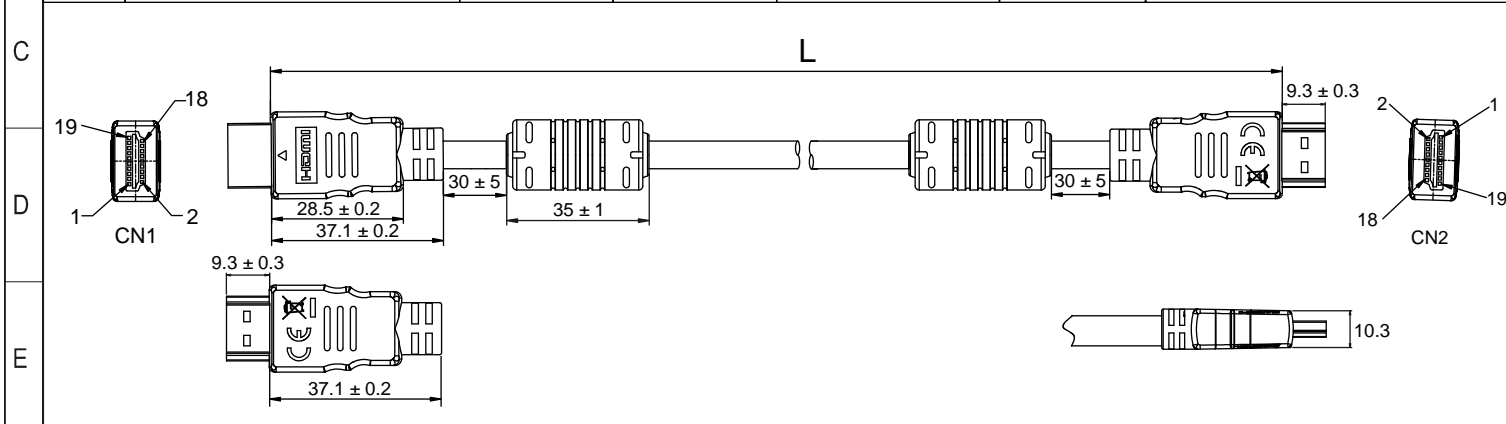

High-Speed-HDMI™-Kabel mit Ethernet (Ferrite)

- hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (Ultra HD 2160p)
- vergoldete HDMI™-Steckverbinder
- integrierter Ethernet-Kanal

Anschlüsse: 2x HDMI™-Stecker (Typ A)
Material Kabelmantel: PVC
Isolationswiderstand: 300 V ===, 10 MΩ min.
Ferritkern: 2x
Unterstützte Audiostandards: Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)
Weitere unterstützte Standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC)

High Speed HDMI™ Cable with Ethernet (Ferrite)

- high-definition signal transmission with up to 4K @ 60 Hz (Ultra HD 2160p)
- gold-plated HDMI™ connectors
- integrated Ethernet channel

Connections: 2x HDMI™ plug (Type A)
Material cable jacket: PVC
Insulation resistance: 300 V ===, 10 MΩ min.
Ferrite core: 2x
Supported audio standards: Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)
Other supported standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC)

| Änderungen | | Datum | Name | Bezeichnung | Blatt |
|--|------|-------------------|------|---|-------|
| Datum | Name | gez.: 09.02.2023 | rs | HDMI 2.0 Kabel Ferrite XXXX Xm (15+1) sw | 1/1 |
| | | gepr.: 09.02.2023 | aw | | |
| | | Norm: | | Zeichnungs-Nr.: | von |
| Änderungen vorbehalten / Subject to change | | | | | |

