


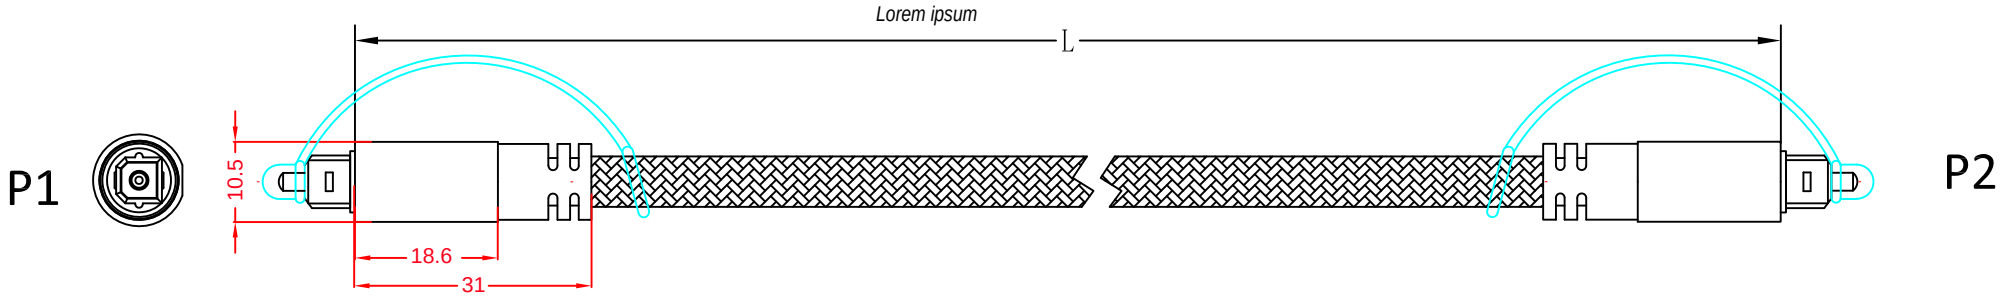


## PIN-Zuordnung | *PIN Assignment*

| P1 | | P2 |
|---|---|---|
| 1 | weiß/links \| *white/left* | 1 |
| 2 | rot/rechts \| *red/right* | 2 |
| 3 | Erdung \| *drain* | 3 |

| Artikel-Nr. \| *Item no.* | Beschreibung \| *Description* | Länge \| *Length* |
|---|---|---|
| 65304 | Toslink M/Toslink M G+ 0100 1,0m | 1000 ± 30 mm |
| 65305 | Toslink M/Toslink M G+ 0200 2,0m | 2000 ± 30 mm |
| 65306 | Toslink M/Toslink M G+ 0300 3,0m | 3000 ± 30 mm |
| 65307 | Toslink M/Toslink M G+ 0500 5,0m | 5000 ± 50 mm |
| 65308 | Toslink M/Toslink M G+ 1000 10,0m | 1000 ± 100 mm |

### TOSLINK-Kabel

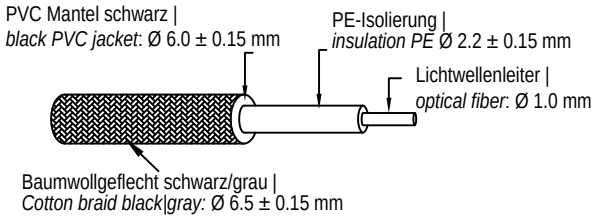- TOSLINK-Kabel zur Audioübertragung von Fernsehern, Spielekonsolen oder Blu-ray-Playern an HiFi-Geräte wie SoundBar, Verstärker oder Stereoanlage
- Als optisches Audiokabel auf Glasfaserbasis ist das Kabel immun gegen elektrische Störeinflüsse - anders als herkömmliche Kupferkabel
- Mit 1 m hat das S/PDIF-Kabel die passende Länge, um Fernseher und HiFi-Anlage komfortabel miteinander zu verbinden
- Flexibles Premium-Kabel mit schlanken Metallsteckern, Knickschutz und farblich abgestimmtem Textilkabel
- Der geflochtene Textilmantel sorgt für eine angenehme Haptik und ist schonend auf sensiblen Oberflächen
- Das Kabel überbrückt auch große Distanzen störungsfrei und verlustfrei
- Vergoldete Stecker beugen Korrosion vor und sind besonders langlebig

| | |
|---|---|
| Anschlüsse: | 2x Toslink-Stecker |
| Material Gehäuse: | Aluminium |
| Material Kontakte: | vergoldet |
| Material Innenleiter: | GfK (Glasfaserverstärkter Kunststoff) |
| Außenmantel: | Ø 6.5 ± 0.15 mm |

### *TOSLINK Cable*

- *TOSLINK cable for audio transmission from TVs, game consoles or Blu-ray players to hi-fi equipment such as a SoundBar, amplifier or stereo system*
- *As an optical, glass fibre audio cable, the cable is immune to electrical interference - unlike conventional copper cables*
- *With 1 m, the S/PDIF cable is the right length to easily connect a TV set and a hi-fi system with each other*
- *Flexible premium cable with slim metal plugs, bend protection and colour-matched textile cable*
- *The braided textile sheath provides a pleasant feel and is gentle on sensitive surfaces*
- *The cable bridges even long distances without interference or losses*
- *The gold-plated plugs prevent corrosion and are especially durable*

| | |
|---|---|
| *Connection:* | *2x Toslink male* |
| *Material housing:* | *Aluminium* |
| *Material contact:* | *gold-plated* |
| *Material inner conductor:* | *FRP (fibreglass-reinforced plastic)* |
| *Cable sheath:* | *Ø 6.5 ± 0.15 mm* |

| Änderungen | | | Datum | Name | Bezeichnung | Blatt |
|---|---|---|---|---|---|---|
| Datum | Name | gez.: | 16.01.2024 | ir | Toslink M/Toslink M G+ XXXX 1x,xm | |
| | | gepr.: | 16.01.2024 | TP | | |
| | | Norm: | | | Zeichnungs-Nr.: | von |
| | | Änderungen vorbehalten / Subject to change | | | 65304ff | |