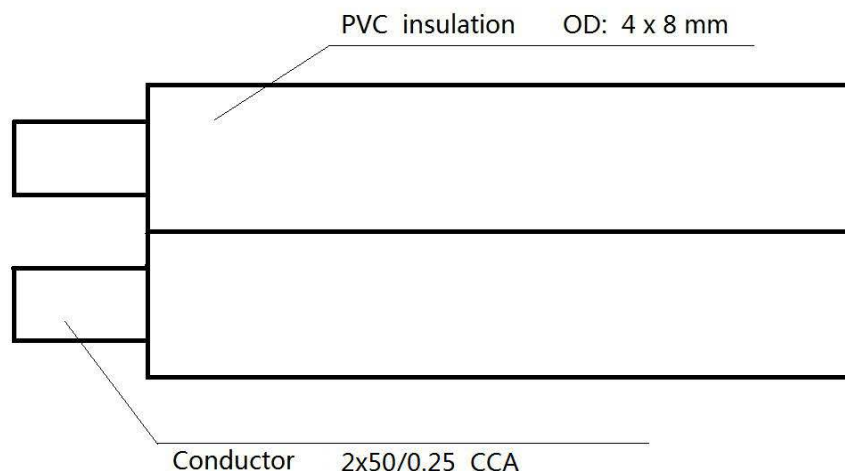
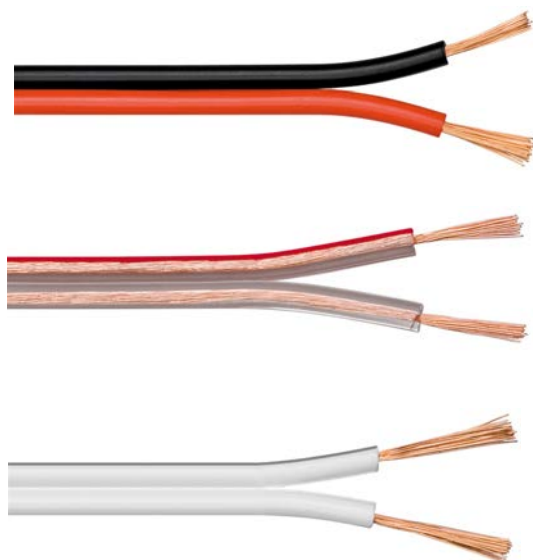



| Product   | Name             | Speaker Cable                        |          |       |                                  |                                                                                       |
|-----------|------------------|--------------------------------------|----------|-------|----------------------------------|---------------------------------------------------------------------------------------|
| Conductor | Material         | Copper Coated Aluminum               |          |       | Electrical Characteristics (20℃) | Max.Conductor DC Resistan<br>at 20℃ (Ω/M) 0.012                                       |
|           | Nom.O.D.<br>(mm) | 2x50/0.25<br>(2x2.5mm <sup>2</sup> ) | Up       | +0.02 |                                  | Rated Voltage (V) ≤36                                                                 |
|           |                  |                                      | Down     | -0.02 |                                  |                                                                                       |
| Jacket    | External O.D.    | 4mm×2c                               | Up       | +0.05 | Sheath Physical Properties       | Rated Temperature(℃)<br>70℃                                                           |
|           |                  |                                      | Down     | -0.05 |                                  |                                                                                       |
|           | Surface          | Smooth                               |          |       | View                             |  |
|           | Material         | PVC(complies RoHS Reach)<br>CPR(Eca) | Drawn By |       |                                  |                                                                                       |
|           |                  |                                      | Page     |       |                                  |                                                                                       |

| no.   | Packaging  | Length (m) | color       |
|-------|------------|------------|-------------|
| 67723 | Cable coil | 10         | transparent |
| 67724 | Cable coil | 25         | transparent |
| 52082 | Cable coil | 50         | transparent |
| 15020 | Cable Reel | 100        | transparent |
| 67750 | Cable coil | 10         | white       |
| 67751 | Cable coil | 25         | white       |
| 67752 | Cable coil | 50         | white       |
| 27525 | Cable Reel | 100        | white       |
| 67735 | Cable coil | 10         | red/black   |
| 67736 | Cable coil | 25         | red/black   |
| 67737 | Cable coil | 50         | red/black   |
| 15024 | Cable Reel | 100        | red/black   |

Eca Fire class (CPR) according to DIN EN 13501-6

| Änderungen                                 |      |        | Datum      | Name |
|--------------------------------------------|------|--------|------------|------|
| Datum                                      | Name | gez.:  | 12.08.2021 | TL   |
| 12.08.2021                                 | TL   | gepr.: |            |      |
|                                            |      | Norm:  |            |      |
| Änderungen vorbehalten / Subject to change |      |        |            |      |

|                 |                                                                         |       |     |
|-----------------|-------------------------------------------------------------------------|-------|-----|
| Bezeichnung     | LSK 2x2,5mm <sup>2</sup>                                                | Blatt | 1/1 |
| Zeichnungs-Nr.: | 27525 15020 15024 67752 52082 67737 67751 67724 67736 67750 67723 67735 | von   |     |

