


1-----3
2-----6
3-----1
4-----4
5-----5
6-----2
7-----7
8-----8

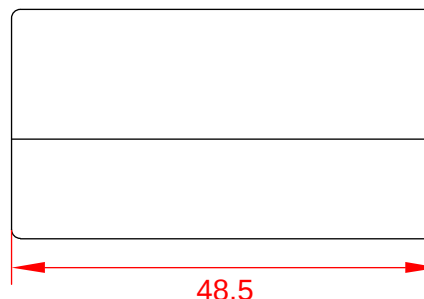

RJ45 crossover Modularkupplung/Verbinder, CAT 5e

- zum Verbinden von zwei Netzkabeln mit RJ45 Steckern für gekreuzte Belegung
- metallisiertes Gehäuse
- geschirmt
- Platinenkontaktierung
- mit gekreuzter/Crossover Belegung
- geeignet für POE+ nach IEEE 802.3AT

Anschlüsse: 2x RJ45-Buchse (8P8C)
Spezifikation: CAT 5e
max. Bandbreite: 100 MHz
Nennspannung: 125 V ~
Nennstrom: 1.5 A
Kontaktwiderstand: 100 MΩ max.
Isolationswiderstand: 100 MΩ min. @ 500 V ---
Durchschlagfestigkeit: 750 V ~; RMS 60 Hz, 1 Minute
Material Gehäuse: PC
Einlagematerial: ABS (flammenhemmend)
Material Platine: FR-4 T = 1,6 mm
Material Kontakte: Phosphorbronze T = 0,30 mm
Dauerhaftigkeit Steckverbindung: 750x min.
Betriebstemperatur: -20°C ~ +85°C
Gewicht: 19 g

RJ45 crossover modular coupler, CAT 5e

- to connect two network cable with RJ45 plugs for crossover pin out
- metallized housing
- shielded
- with PCB board
- with crossover pin out
- suitable for POE+ according to IEEE 802.3AT

Connectors: 2x RJ45 female (8P8C)
Specification: CAT 5e
max. Bandwidth: 100 MHz
Rated voltage: 125 V ~
Rated current: 1.5 A
Contact resistance: 100 MΩ max.
Insulation resistance: 100 MΩ min. @ 500 V ---
Dielectric strength: 750 V ~; RMS 60 Hz, 1 minute
Material housing: PC
Insert material: ABS (flame retardant)
Material PCB: FR-4 T = 1.6 mm
Material contacts: phosphor bronze T = 0.30 mm
Mating durability: 750x min.
Operating temperature: -20°C ~ +85°C
Weigth: 19 g

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	22.04.2021	aw
		gepr.:	22.04.2021	aw
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung

NET MODULAR KUPPLUNG
CAT 5 2xRJ45 female CROSSOVER



Zeichnungs-Nr.:

68161

Blatt

1/1

von