


SPECIFICATIONS	
Nominal Voltage	1.5 V
Rated Capacity	50 mAh on 6.8 kΩ to 1.2V
Average Weight	1.09 g (0.038 oz)
Terminals	Flat
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
NEDA/ANSI:	1168A
IEC:	LR54
Other:	LR1131

15K Ohm Cont. to 1.2V Capacity

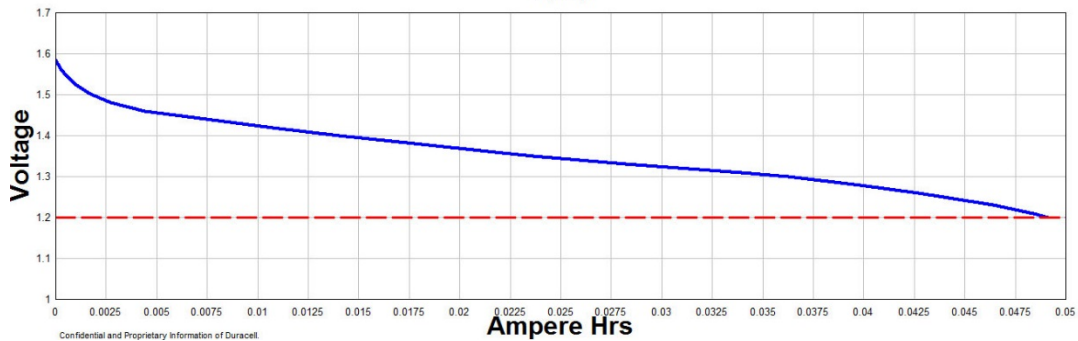

DURACELL®

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.