


ALKALINE-MANGANESE DIOXIDE BATTERY



Size: AAA (L03) PC2400

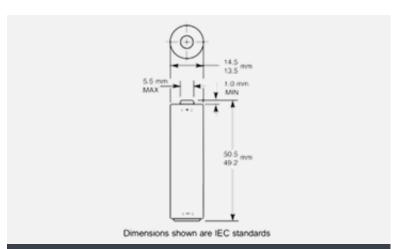

Dimensions shown are IEC standards

KEY FEATURES

- Reliable Performance
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environmental standards:
 - o Safety: IEC 60086-5
 - o ANSI C 18.1M, Part-2
 - o EU Battery Directive
 - Quality: ISO 14001 and 9001, Duracell World Class Continuous Improvement Program

TYPICAL APPLICATIONS

- Remote Controls
- Sensors
- Security keypads
- Wireless mouse

ELECTRICAL CHARACTERISTICS

Nominal capacity (43 Ω Cont., .8V cut-off)

1,236 mAh

Typical Voltage (at + 20 °C)

1.5 V

AC Impedance @ 1kHz

116 mΩ

PHYSICAL CHARACTERISTICS

Typical weight 11.6 g (0.4 oz)

Typical volume 3.5 cm³ (0.2 in³)

Terminals

OPERATING & STORAGE CONDITIONS

Operating temperature range

-20°C to 54°C (-4°F to 130°F)

Flat

 Recommended Storage (storage area should be clean, cool, dry and ventilated)

5°C to 30°C (41°F to 86° F)

PROCELL®

PROFESSIONAL BATTERIES

Duracell Industrial Operations

Berkshire Corporate Park

Phone: 1-800-544-5454 (Toll-free)


www.procell.com


Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


This data is subject to change. Performance information is typical. Contact Duracell for the latest information.




TYPICAL PERFORMANCE

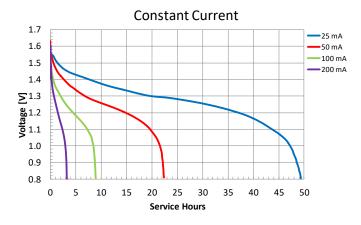








Typical Internal Resistance





PROFESSIONAL BATTERIES

Duracell Industrial Operations Berkshire Corporate Park

Phone: 1-800-544-5454 (Toll-free)

www.procell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information.