

M1-S


Live Performance Dynamic Microphone with Lockable Switch

AUSTRALIA

107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA

PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664

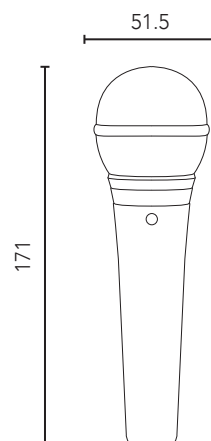

Features


- Live dynamic vocal microphone
- High output neodymium capsule
- Locking on/off switch
- XLR security lock
- Heavy duty metal body
- Low handling noise
- Designed and manufactured in Australia
- Lifetime warranty*

Specifications


Acoustic Principle	Dynamic
Directional Pattern	Cardioid
Frequency Range	75Hz ~ 18,000Hz
Sensitivity	-56dB $\pm$ 2dB re 1V/Pa (1.6mV @ 94 dB SPL) @ 1kHz
Normal Impedance	320 Ω
Dimensions	Length - 171mm (6.73") Diameter - 51.5mm (2.03")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	700g (1.54lb)
Net Weight	360g (0.79lb)



Polar Pattern



Frequency Response

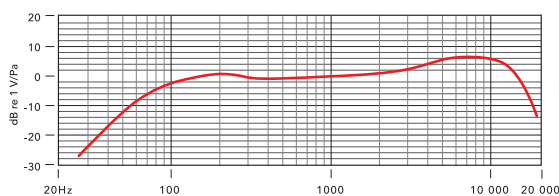

Notes

*Microphone must be registered at www.rodemic.com to activate extended warranty.

RØDE
MICROPHONES