

M2


Live Condenser Microphone

AUSTRALIA

107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA

PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664

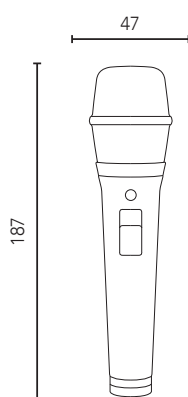


Features

- Live condenser vocal microphone
- Feedback rejecting super-cardioid pick up pattern
- Locking on/off switch
- Heavy duty metal body
- High level of RF rejection
- Low handling noise
- Designed and manufactured in Australia
- Includes RM3 stand mount and ZP1 zip pouch
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient
Directional Pattern	Super-Cardioid
Frequency Range	35Hz ~ 20,000Hz
Sensitivity	-44dB $\pm$ 2dB re 1V/Pa (6.3mV @ 94 dB SPL) @ 1kHz
Equivalent Noise	23dBA SPL (A - weighted per IEC651)
Maximum Output	+5.2dBu (@ 1% THD into 1k Ω)
Dynamic Range	118dB (per IEC651)
Maximum SPL	141dB (@ 1kHz, 1% THD into 1k Ω load)
Signal/Noise	71dB SPL (A - weighted per IEC651)
Power Req.	24/48V Phantom Power
Dimensions	Length - 187mm Diameter - 47mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	545g
Net Weight	308g

Polar Pattern



Frequency Response

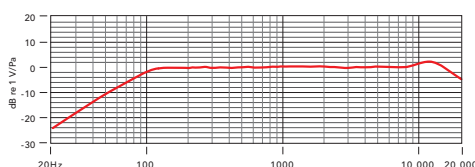

Notes

*Microphone must be registered at www.rodemic.com to activate extended warranty.

RØDE
MICROPHONES