



Enhanced productivity


Dell Pro 27 Plus QHD Monitor

MODEL: P2725D

The world's # 1 monitor company*

* Dell monitors are #1 Worldwide for 10 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q3 2024. From 2014 to 2024.

Ports & Slots

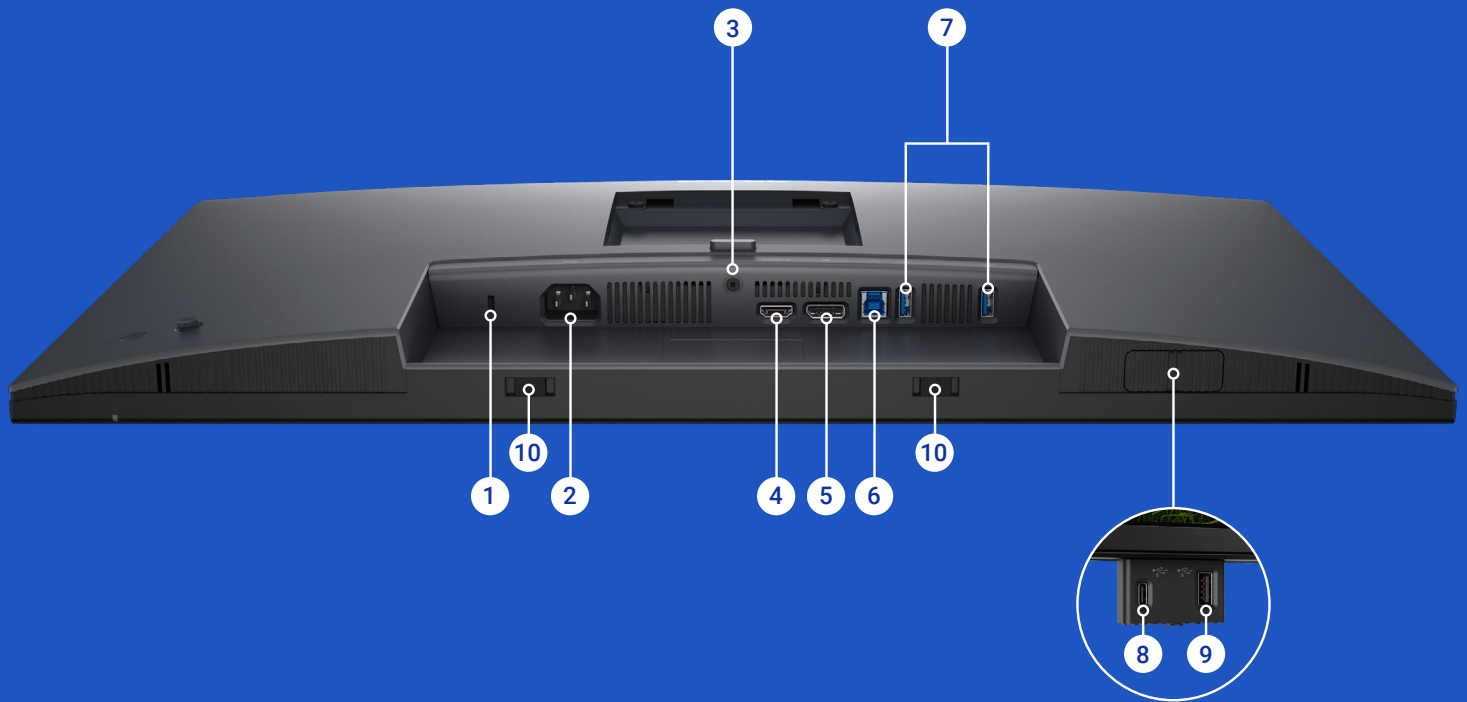

- 1** Security lock slot¹
- 2** Power connector
- 3** Stand-lock
- 4** HDMI
- 5** DisplayPort 1.4
- 6** USB 5Gbps Type-B upstream

- 7** USB 5Gbps Type-A downstream (2)
- 8** USB-C 5Gbps downstream (Data only)
- 9** USB 5Gbps Type-A downstream
- 10** Soundbar slots

¹ Based on Kensington Security Slot™

FEATURE	TECHNICAL SPECIFICATION
MODEL	Dell Pro 27 Plus QHD Monitor - P2725D
DIAGONAL VIEWING SIZE	684.7 mm (27.0 in.)
PANEL TYPE	In-Plane Switching (IPS) Technology
MAXIMUM PRESET RESOLUTION AND REFRESH RATE	2560 x 1440 up to 100 Hz
VIEWING ANGLE	Horizontal: 178° Vertical: 178°
PIXEL PITCH	Horizontal: 0.2331 mm Vertical: 0.2331 mm
PIXEL PER INCH (PPI)	109
CONTRAST RATIO	1500:1 (typical)
ASPECT RATIO	16:9
BACKLIGHT TECHNOLOGY	LED Edgelight System
BRIGHTNESS	350 cd/m ² (typical)
RESPONSE TIME	Normal mode: 8.0 ms (gray to gray) Fast mode: 5.0 ms (gray to gray)
COLOR GAMUT	sRGB 99% (CIE 1931) (typical)
COLOR DEPTH	16.7 million colors
TÜV EYECOMFORT	4 stars
CONNECTIVITY	Video port • 1 x HDMI port (HDCP1.4) (supports up to QHD 2560 x 1440 100 Hz TMDS as per specified in HDMI 2.1) • 1 x Display Port 1.4 (HDCP1.4)(Support up to 2560 x 1440 100Hz) USB port • 1 x USB 5Gbps Type-B upstream port • 1 x USB-C 5Gbps downstream port • 3 x USB 5Gbps Type-A downstream ports
USB POWER DELIVERY	USB-C downstream port up to 15 W
ADJUSTABILITY	• Height adjustment up to 150.0 mm • Tilt -5°/+21° • Swivel -45°/+45° • Pivot -90°/+90°
DISPLAY SCREEN COATING	Anti-glare with hard-coating 3H
SOFTWARE COMPATIBILITY	Dell Display and Peripheral Manager (DDPM) for Windows
REMOTE ASSET MANAGEMENT	Yes, using DDPM
OPERATION TIME SUPPORT	8 hours a day, 5 days a week (8/5)
VOLTAGE REQUIRED	100 VAC to 240 VAC/50 Hz or 60 Hz ± 3 Hz/1.5 A
ENERGY EFFICIENCY CLASS (A TO G SCALE)	E 
POWER CONSUMPTION ¹	0.30 W (Off mode) 0.30 W (Standby mode) 18.80 W (On mode) 75.00 W (Max) 18.40 W (Pon) 58.12 kWh (TEC)
BEZEL WIDTH – TOP	7.88 mm (0.31 in.)
BEZEL WIDTH – LEFT OR RIGHT	7.88 mm (0.31 in.)
BEZEL WIDTH – BOTTOM	13.02 mm (0.51 in.)

FEATURE	TECHNICAL SPECIFICATION
DIMENSIONS (WITH STAND) – HEIGHT (EXTENDED)	535.70 mm (HAS Stand) (21.09 in. (HAS Stand))
DIMENSIONS (WITH STAND) – HEIGHT (COMPRESSED)	385.70 mm (HAS Stand) (15.19 in. (HAS Stand))
DIMENSIONS (WITH STAND) – WIDTH	612.50 mm (24.11 in.)
DIMENSIONS (WITH STAND) – DEPTH	192.16 mm (7.57 in.)
DIMENSIONS (WITHOUT STAND) – HEIGHT	356.55 mm (14.04 in.)
DIMENSIONS (WITHOUT STAND) – WIDTH	612.50 mm (24.11 in.)
DIMENSIONS (WITHOUT STAND) – DEPTH	49.99 mm (1.97 in.)
STAND DIMENSIONS – HEIGHT (EXTENDED)	428.30 mm (HAS Stand) (16.86 in. (HAS Stand))
STAND DIMENSIONS – HEIGHT (COMPRESSED)	381.50 mm (HAS Stand) (15.02 in. (HAS Stand))
STAND DIMENSIONS – WIDTH	272.84 mm (10.74 in.)
STAND DIMENSIONS – DEPTH	189.00 mm (7.44 in.)
WEIGHT WITH PACKAGING	8.67 kg (19.11 lb)
WEIGHT WITH STAND ASSEMBLY AND CABLES	6.27 kg (13.82 lb)
WEIGHT WITHOUT STAND ASSEMBLY (WITHOUT CABLES)	4.28 kg (9.44 lb)
WEIGHT OF STAND ASSEMBLY	1.60 kg (3.53 lb)
FLAT PANEL MOUNT INTERFACE	VESA (100 mm x 100 mm)
SECURITY	Security lock slot (cable lock sold separately) Anti-theft stand lock slot (to panel)
COMPLIANT STANDARDS	- ENERGY STAR 8.0 - EPEAT Gold with Climate+ - TCO Certified and TCO Certified Edge - RoHS-compliant - Product Safety, EMC and Environmental Datasheets - Dell Regulatory Compliance Home Page - Dell and the Environment - TÜV Rheinland Eye Comfort 4 Star - BFR/PVC free monitor (excluding external cables). - Meets NFPA 99 leakage current requirements. - Arsenic-free glass and Mercury-free panel only
TEMPERATURE RANGE	- Operating: 0°C to 40°C (32°F to 104°F) - Non-Operating: -20°C to 60°C (-4°F to 140°F)
HUMIDITY RANGE	- Operating: 10% to 80% (non-condensing) - Non-Operating: 5% to 90% (non-condensing)
ALTITUDE	- Operating: 5,000 m (16,404 ft) maximum - Non-Operating: 12,192 m (40,000 ft) maximum
WHAT'S INCLUDED	- Monitor with stand - Power cable 1 x DisplayPort to DisplayPort 1.4 cable - 1.80 m 1 x HDMI 2.0 cable - 1.80 m (for China, HK/TW/KR, & Japan only) 1 x USB Type-A to Type-B 5Gbps cable - 1.80 m - QR card - Safety, Environmental, and Regulatory Information

Steadfast reliability

As the No. 1 monitor company worldwide*, we take pride in our unyielding commitment to quality and the utmost in customer satisfaction.

Premium Panel Exchange


Dell Premium Panel Exchange¹ allows a free monitor replacement during the Limited Hardware Warranty² period even if only one bright pixel is found.

Advanced Exchange Service

This monitor comes with a 3-year Advanced Exchange Service³ so that if a replacement becomes necessary, it will be shipped to you the next business day during your 3-year Limited Hardware Warranty.²

ProSupport

Upgrade to 24x7 specialized technical phone support with the Dell ProSupport option.⁴

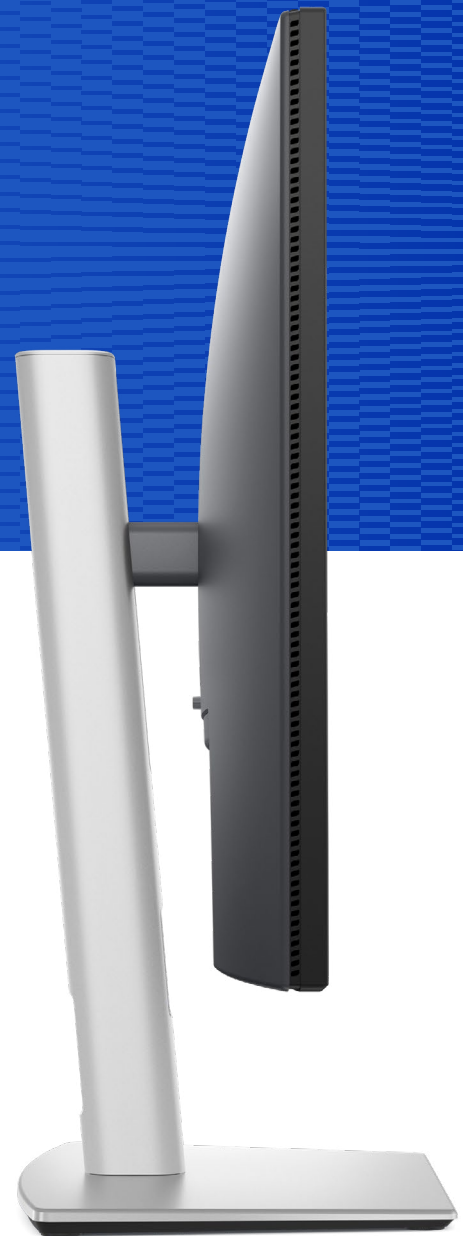

* Dell monitors are #1 Worldwide for 10 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q3 2024. From 2014 to 2024.

¹ Applicable to Dell UltraSharp and Dell Pro Plus desktop monitors.

² For copy of Ltd Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see <https://www.dell.com/warranty>.

³ Advanced Exchange: Dell will send you a replacement monitor the next business day in most cases, if deemed necessary after phone/online diagnosis. Shipping times may vary by location and for monitors 55" and above. Fee charged for failure to return defective unit. See dell.com/servicecontracts/global.

⁴ Availability varies, please visit www.dell.com/support for details. In some countries, hours for in-region support may vary. Support after local business hours may be provided in a language other than the local language.

Technical specifications subject to change without prior notice. Product availability varies by country. Please contact your Dell representative for more information.

© 2025 Dell Inc. or its subsidiaries. All Rights Reserved. Dell Technologies, Dell, EMC, Dell EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners. USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum. Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries.