

Procaster

Broadcast Quality Dynamic Microphone

AUSTRALIA

107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA

PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664



Features


- Broadcast quality sound
- High output dynamic capsule
- Balanced, low impedance output
- Internal shock mounting of capsule for low handling noise
- Internal pop-filter to reduce plosives
- Robust, all metal construction
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at www.rodemic.com/warranty

Specifications


Acoustic Principle	Dynamic
Directional Pattern	Cardioid
Frequency Range	75Hz ~ 18,000Hz
Sensitivity	-56dB $\pm$ 2dB re 1V/Pa @ 1kHz (1.6mV/Pa @ 94dB SPL)
Output Impedence	320 Ω
Dimensions	Length - 214mm (8.425") Diameter - 53mm (2.086")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	1,100g
Net Weight	695g

Incl. Accessories


- RM2 stand mount
- ZP1 zip pouch

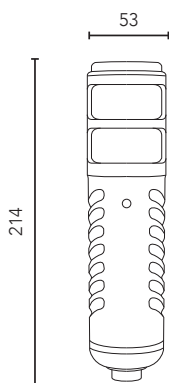

Polar Pattern



Frequency Response

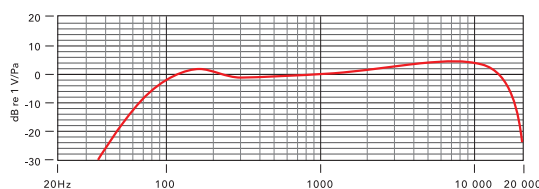

RØDE
MICROPHONES