

ULTRASHARP MONITOR

DELL ULTRASHARP 34 CURVED USB-C HUB MONITOR – U3423WE

DELL ULTRASHARP 34 CURVED USB-C HUB MONITOR – U3423WE TECHNICAL SPECIFICATION

DIAGONAL VIEWING SIZE	86.72 cm 34.14 inches
PRESET DISPLAY AREA (H X V)	800.05 mm x 335.05 mm 31.50" x 13.19"
MAXIMUM PRESET RESOLUTION	3440 x 1440 @ 60Hz
PANEL TYPE	IPS Black Technology
DISPLAY SCREEN COATING	Anti-glare treatment of the front polarizer (3H) hard coating
VIEWING ANGLE	178° vertical / 178° horizontal
PIXEL PITCH	0.2325 mm x 0.2325 mm
PIXEL PER INCH (PPI)	109
CONTRAST RATIO	2000 to 1 (typical)
ASPECT RATIO	21:9
BACKLIGHT TECHNOLOGY	White LED Edgelight System
BRIGHTNESS	300 cd/m ² (typical)
COLOR GAMUT	100% sRGB, DCI-P3 98%, Display P3 98%, REC 709 100% (Delta E < 2), 1.07 billion colors
RESPONSE TIME	5 ms gray to gray in Fast mode 8 ms gray to gray in Normal mode
HDR READY	No
CONNECTIVITY	• 1 x DisplayPort version 1.4 (HDCP2.2) • 2 x HDMI port version 2.1 (TMDS) (HDCP2.2)¹ • 1 x USB Type-C upstream port (video and data) (Alternate mode with DisplayPort 1.4, Power Delivery PD up to 90W) • 1 x USB-C upstream port (data only, 10Gbps USB 3.2 Gen2) • 4 x super speed USB 10Gbps (USB 3.2 Gen2) Type-A downstream port • 1 x super speed USB 10Gbps (USB 3.2 Gen2) Type-C downstream port with charging capability at 15 W (maximum) • 1 x super speed USB 10Gbps (USB 3.2 Gen2) Type-A with BC1.2 charging capability at 2 A (maximum) • 1 x Audio line-out port • 1 x RJ45 port
ADJUSTABILITY	Height adjustable (150 mm) Tilt (-5° to 21°) Swivel (-30° to 30°) Slant Adjust (-4° to 4°) Pivot (NA)
PBP / PIP	PbP (Yes) PiP (Yes)
KEYBOARD, VIDEO AND MOUSE (KVM)	Yes, KVM and Auto KVM
DAISY CHAIN AVAILABILITY	No
AUDIO OUTPUT	1 x Audio line-out ²
BUILT-IN SPEAKER	Yes - 2 x 5W
DELL DISPLAY MANAGER COMPATIBILITY	Yes, Easy Arrange, Other key features
SPECIFICATIONS - SERVICE / SUPPORT DETAILS	3-Year Advanced Exchange Service and Premium Panel Exchange
HEIGHT WITH STAND (COMPRESSED ~ EXTENDED)	392.77 mm ~ 542.77 mm (15.46" ~ 21.37")
WIDTH WITH STAND	813.26 mm (32.02")
DEPTH WITH STAND	237.44 mm (9.35")
HEIGHT WITHOUT STAND	359.05 mm (14.14")
WIDTH WITHOUT STAND	813.26 mm (32.02")

1 Not supporting the HDMI 2.1 optional specification, including HDMI Ethernet Channel (HEC), Audio Return Channel (ARC), standard for 3D format and resolutions, standard for 4K digital cinema resolution, HDR, Fixed Rate Link (FRL), Enhanced audio return channel (eARC), Variable Refresh Rate (VRR), Quick Media Switching (QMS), Quick Frame Transport (QFT), Auto Low Latency Mode (ALLM), Display Stream Compression (DSC), and Source-Based Tone Mapping (SBTM).

2 Connect Speakers. Headphone use is not supported for the audio line out connector.

ULTRASHARP MONITOR

DELL ULTRASHARP 34 CURVED USB-C HUB MONITOR – U3423WE

DELL ULTRASHARP 34 CURVED USB-C HUB MONITOR – U3423WE TECHNICAL SPECIFICATION

DEPTH WITHOUT STAND 57.50 mm (2.36")

**WEIGHT (PANEL ONLY - FOR
VESA MOUNT)** 7.72 kg (17.01 lb)

**WEIGHT (WITH STAND
ASSEMBLY AND CABLES)** 11.44 kg (25.21 lb)

WEIGHT (WITH PACKAGING) 15.65 kg (34.49 lb)

SECURITY Security lock slot (cable lock sold separately)
Anti-theft stand lock slot (to lock stand to monitor using screw)

COMPLIANT STANDARDS

- ENERGY STAR® Certified Monitor
- EPEAT® Gold registered where applicable
- RoHS Compliant
- TCO Certified & TCO Certified Edge
- BFR/PVC Free (Halogen-free) (excluding external cables)
- Arsenic-Free glass and Mercury-Free for the panel only

**FLAT PANEL MOUNT
INTERFACE** VESA mounting holes
(100 mm x 100 mm - behind attached VESA Cover)

TEMPERATURE RANGE Operating: 0°C to 40°C (32°F to 104°F)
Non-operating: -20°C to 60°C (-4°F to 140°F)

HUMIDITY RANGE Operating: 10% to 80% (non-condensing)
Non-Operating: 5% to 90% (non-condensing) - Storage and Shipping


ALTITUDE Operating: 5000 m (16404 ft) max
Non-Operating: 12192 m (40000 ft) max

VOLTAGE REQUIRED 100 VAC to 240 VAC / 50 Hz or 60 Hz + 3 Hz / 3.0 A (max)

**POWER CONSUMPTION
NORMAL OPERATION** 0.3 W (Off Mode)
0.3 W (Standby Mode)
31 W (On Mode)
198 W (Max)

WHAT'S INCLUDED Monitor, Stand Riser, Stand Base
1 x Power cable
1 x Type-C Gen 2 (C-C cable) - 1 m
1 x DP Cable (DP to DP) - 1.8 m
1 x (Type-A to Type-C) Gen 2 cable - 1 m
1 x HDMI cable (HDMI-HDMI) - 1.8 m
Quick setup guide
Safety, Environmental and Regulatory Information

PORTS AND SLOTS

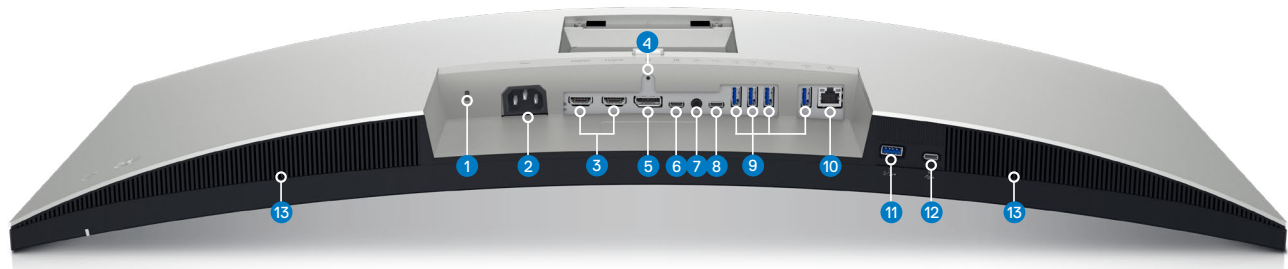

- 1 Security lock slot (based on Kensington Security Slot™)
- 2 Power connector
- 3 HDMI port (2)
- 4 Stand lock feature
- 5 DisplayPort

- 6 Type-C upstream port (video and data) Super speed USB 10Gbps (USB 3.2 Gen2)
- 7 Audio line-out port¹
- 8 Type-C upstream port (data only) Super speed USB 10Gbps (USB 3.2 Gen2)

- 9 Type-A downstream port (4) Super speed USB 10Gbps (USB 3.2 Gen2)
- 10 RJ45 port
- 11 Type-A downstream port with Power Charging. Super speed USB 10Gbps (USB 3.2 Gen2)

- 12 Type-C downstream port. Super speed USB 10Gbps (USB 3.2 Gen2)
- 13 Speakers

1 Connect Speakers. Headphone use is not supported for the audio line out connector.