

VideoMic

Directional Video Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664




Specifications


Acoustic Principle	Line Gradient
Directional Pattern	Super-Cardioid
Frequency Range	40Hz ~ 20,000Hz (selectable HPF@80Hz)
Sensitivity	-38dB \pm 2dB re 1V/Pa @ 1kHz
Nominal Impedance	200 Ω - phantom power
Equivalent Noise	20dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k Ω)
Dynamic Range	114dB (per IEC651)
Maximum SPL	134dB (@ 1kHz, 1% THD into 1k Ω load)
Signal/Noise	74dB SPL (A - weighted per IEC651)
Power Req.	9V alkaline battery (Current 5mA)
Dimensions	248mmL x 80mmH x 98mmD
Output Connection	3.5mm mini-jack
Net Weight	171g

Features


- Studio recording quality
- Condenser microphone
- 9V battery powered
- Integrated Rycote® Lyre® shock mounting
- Two step High Pass Filter (Flat/80Hz)
- Three step PAD (0, =10, -20dB)
- Rugged reinforced ABS construction
- Windshield included
- 3.5mm mini-jack output
- Integrated cold-shoe mount (3/8" thread)
- Designed in Australia
- Free 10 year extended warranty with online registration at www.rodemic.com/ warranty

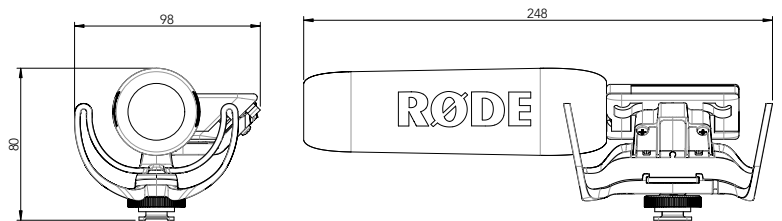

Polar pattern

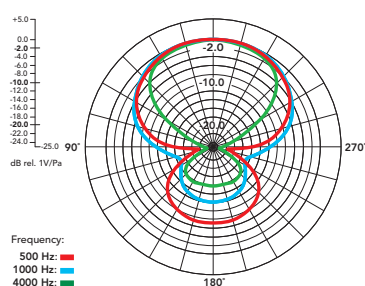

Frequency response

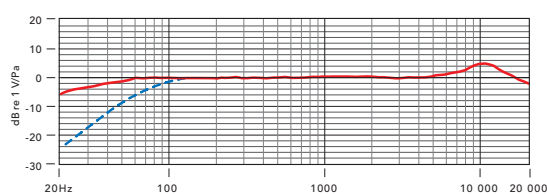

RØDE
MICROPHONES