

PATH TO THE FUTURE


Visualisiere deinen Sieg mit dem MPG 491CQPDE QD-OLED Gaming-Monitor. Er beeindruckt mit einem 5120x1440 (DQHD) 1800R gebogenen QD-OLED-Panel der nächsten Generation, einer Bildwiederholrate von 144 Hz und einer schnellen Reaktionszeit von 0,03 ms (GtG). Die VESA-Zertifizierung für ClearMR 8000 und DisplayHDR True Black 400 garantiert außergewöhnlich lebendige Bilder und reduziert Bewegungsunschärfe. OLED Care 2.0 minimiert das Risiko von OLED-Burn-in. Für Konsolenspieler bietet der MPG 491CQPDE QD-OLED HDMI 2.1-Anschlüsse mit 48 Gbps Bandbreite, 120 Hz Unterstützung, VRR und ALLM. Tauche ein in eine Welt voller fesselnder Gaming-Erlebnisse.



Picture and logos

SELLING POINTS

- QD-OLED-Panel der nächsten Generation- Mit atemberaubender Bildqualität und schneller Reaktionszeit.
- Schnelle 0,03ms GtG Reaktionszeit und 144Hz Bildwiederholrate.
- QD Premium Color - Die Farben entsprechen dem Marktstandard - Delta E≤2.
- Unglaubliches HDR-Bild - VESA DisplayHDR True Black 400.
- Gaming Intelligence App - Erstelle die optimalen Anzeigeeinstellungen für deine Games.
- MSI OLED Care 2.0 - Reduziert das Risiko, dass OLED-Bilder einbrennen.
- KVM - Steuere mehrere Geräte über ein Set aus Tastatur, Maus und Monitor.
- Konsolenmodus - Unterstützt HDMI™ 2.1 mit voller Bandbreite von 48 Gbps.

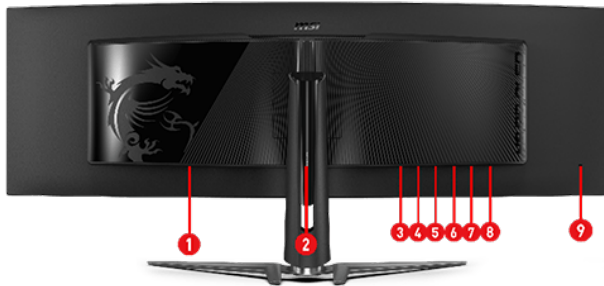

1. Stromanschluss
2. 5 Wege Joysticknavigation
3. 2 x HDMI™ (2.1)
4. DisplayPort (1.4a)
5. USB Typ-C (PD 90W)
6. 2 x USB 2.0 Typ-A
7. USB 2.0 Typ-B
8. Kopfhörerausgang
9. Kensingtonschloss



MONITOR

MPG 491CQPDE QD-OLED

MPG 491CQPDE QD-OLED

SPECIFICATION

Model	SKU Number	9S6-3FA84T-008
	Entity MKT Name	MPG 491CQPDE QD-OLED
	Part No	9S6-3FA84T-035
	Color	ID1/Black-Black
Display	Screen Size	49" (124.46 cm)
	Active Display Area (mm)	1196.7(H) x 339.2(V)
	Curvature	Curve 1800R
	Panel Type	QD-OLED
	Resolution	5120x1440 (DQHD)
	Pixel pitch (mm)	0.233(H)x0.233(V)
	Aspect Ratio	32:9
	Dynamic Refresh Rate technology	FreeSync Premium Pro
	Dynamic Refresh Rate Activated Range	48~144Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	232.2~234.4 KHz(H) / 48~144 Hz(V)
	Refresh Rate	144HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	127.4%/94.11%
	NTSC (CIE1931 area percentage/overlap)	108.47%/93.21%
	sRGB (CIE1976 area percentage/overlap)	146.11%/100%
	sRGB (CIE1931 area percentage/overlap)	153.15%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	125.24%/98.07%
	Adobe RGB (CIE1931 area percentage/overlap)	113.53%/95.78%
	DCI-P3 (CIE1976 area percentage/overlap)	116.34%/99.28%
	DCI-P3 (CIE1931 area percentage/overlap)	112.9%/99.06%
	Rec.709 (CIE1976 area percentage/overlap)	146.11%/100%
	Rec.709 (CIE1931 area percentage/overlap)	153.15%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	84.78%/84.4%
	Rec.2020 (CIE1931 area percentage/overlap)	81%/80.92%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
Schnittstellen	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Power	Power Type	Power Cable
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	43
	Annual Energy Consumption (KWh)	N/A
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
	Power Cord Type	C13



MONITOR

MPG 491CQPDE QD-OLED

MPG 491CQPDE QD-OLED

Zubehör	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 100 mm
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	1195 x 328 x 410
	Product Dimension without Stand (WxDxH) (mm)	1195 x 190 x 372
	Stand Dimension (WxDxH) (mm)	634 x 318 x 371
	Weight (Net kg)	10.3
	Weight Without Stand (kg)	8.1
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	133.2 x 28.6 x 49.3
	Outer Carton Dimension (WxDxH) (cm)	135 x 30.1 x 52
	Weight (Gross kg)	16.
Barcode Info	EAN	4711377332866