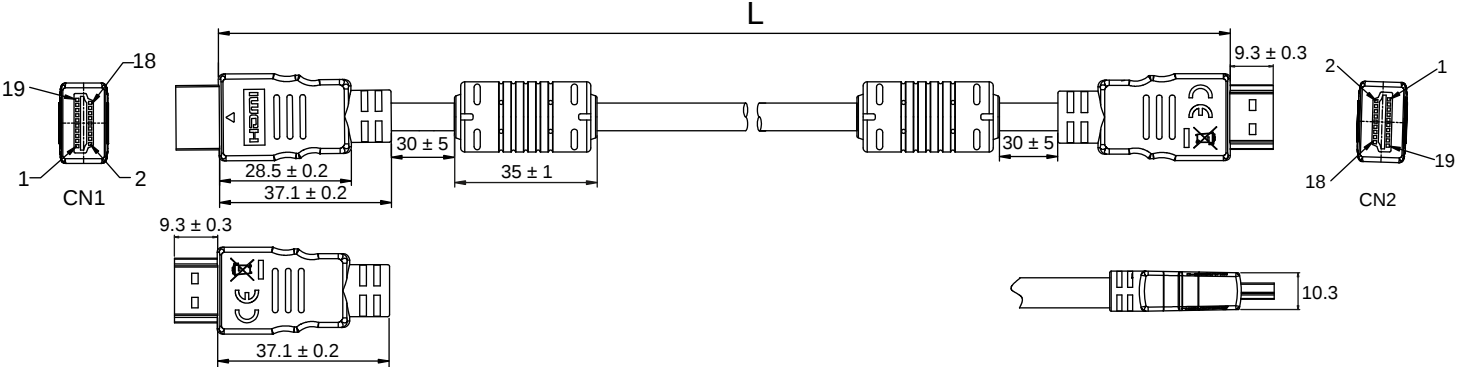
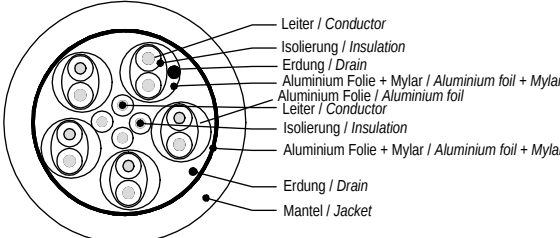


	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
A	Art.-Nr. / Item No.	Beschreibung / Description		Länge / Length (L)	Kontaktwiderstand / Contact resistance	Max. Übertragungsrate / Max. data transmission rate	AD Kabelmantel / OD cable jacket	Kabeldurchmesser / Cable diameter			Pin-Belegung / Pin Assignment				A	
B	61299	HDMI 2.0 Kabel Ferrite 0100 1,0m (15+1) sw		1000 ± 20 mm	5 Ω max.	18 Gbit/s	5.5 ± 0.2 mm	30AWG (1/0.254CCS) * 1P + AL) * 4P + (1/0.254CCS) * 1P + E + AM) * 1P + 30# (1/0.254CCS) * 4C + D (1/0.254CCS) + AL			CN1		CN2		B	
	61300	HDMI 2.0 Kabel Ferrite 0150 1,5m (15+1) sw		1500 ± 30 mm	5 Ω max.	18 Gbit/s	5.5 ± 0.2 mm				1 1 3 3 braun / brown		14 14 19 19 orange / orange			
	61301	HDMI 2.0 Kabel Ferrite 0200 2,0m (15+1) sw		2000 ± 30 mm	5 Ω max.	18 Gbit/s	5.5 ± 0.2 mm				4 4 6 6 weiß / white blau / blue		17 17 13 13 grün / green			
	61302	HDMI 2.0 Kabel Ferrite 0300 3,0m (15+1) sw		3000 ± 50 mm	10 Ω max.	18 Gbit/s	5.5 ± 0.2 mm				7 7 9 9 weiß / white grün / green		15 15 16 16 weiß / white grau / grey			
	61303	HDMI 2.0 Kabel Ferrite 0500 5,0m (15+1) sw		5000 ± 100 mm	10 Ω max.	10.2 Gbit/s	5.5 ± 0.2 mm				10 10 12 12 weiß / white rot / red		18 18 SHELL Erdung + Geflecht / Drain + Braid SHELL			
	61304	HDMI 2.0 Kabel Ferrite 1000 10,0m (15+1) sw		10000 ± 200 mm	20 Ω max.	10.2 Gbit/s	5.5 ± 0.2 mm	26AWG (1/0.40CCS) * 1P+AM) * 4P + (1/0.40CCS) * 1P + E + AM) * 1P + 30# (1/0.254CCS) + 4C + D (1/0.254CCS) + AL							C	
61305	HDMI 2.0 Kabel Ferrite 1500 15,0m (15+1) sw		15000 ± 300 mm	30 Ω max.	10.2 Gbit/s	7 ± 0.2 mm										
C														D		
D														E		
E														F		
F	High-Speed-HDMI™-Kabel mit Ethernet (Ferrite) - hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (Ultra HD 2160p) - vergoldete HDMI™-Steckverbinder - integrierter Ethernet-Kanal High Speed HDMI™ Cable with Ethernet (Ferrite) - high-definition signal transmission with up to 4K @ 60 Hz (Ultra HD 2160p) - gold-plated HDMI™ connectors - integrated Ethernet channel													F		
G	 Anschlüsse: Material Kabelmantel: Isolationswiderstand: Ferritkern: Unterstützte Audiostandards: Weitere unterstützte Standards: 2x HDMI™-Stecker (Typ A) PVC 300 V ===, 10 MΩ min. 2x Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC) HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC) Connections: Material cable jacket: Insulation resistance: Ferrite core: Supported audio standards: Other supported standards: 2x HDMI™ plug (Type A) PVC 300 V ===, 10 MΩ min. 2x Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC) HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC)													G		
H														H		
I	Änderungen				Datum	Name		Bezeichnung			Blatt			I		
J	Datum		Name		gez.:	09.02.2023	rs		HDMI 2.0 Kabel Ferrite XXXX Xm (15+1) sw			 1/1			von	J
					gepr.:	09.02.2023	aw									
					Norm:				Zeichnungs-Nr.:							
Änderungen vorbehalten / Subject to change																
1	2	3	4	5	6	7	8	9	10	11	12	13	14			