LogiLink®

PoE+ Injector, 30 W
IEEE802.3at Type 2

Art. No.: **POE004**

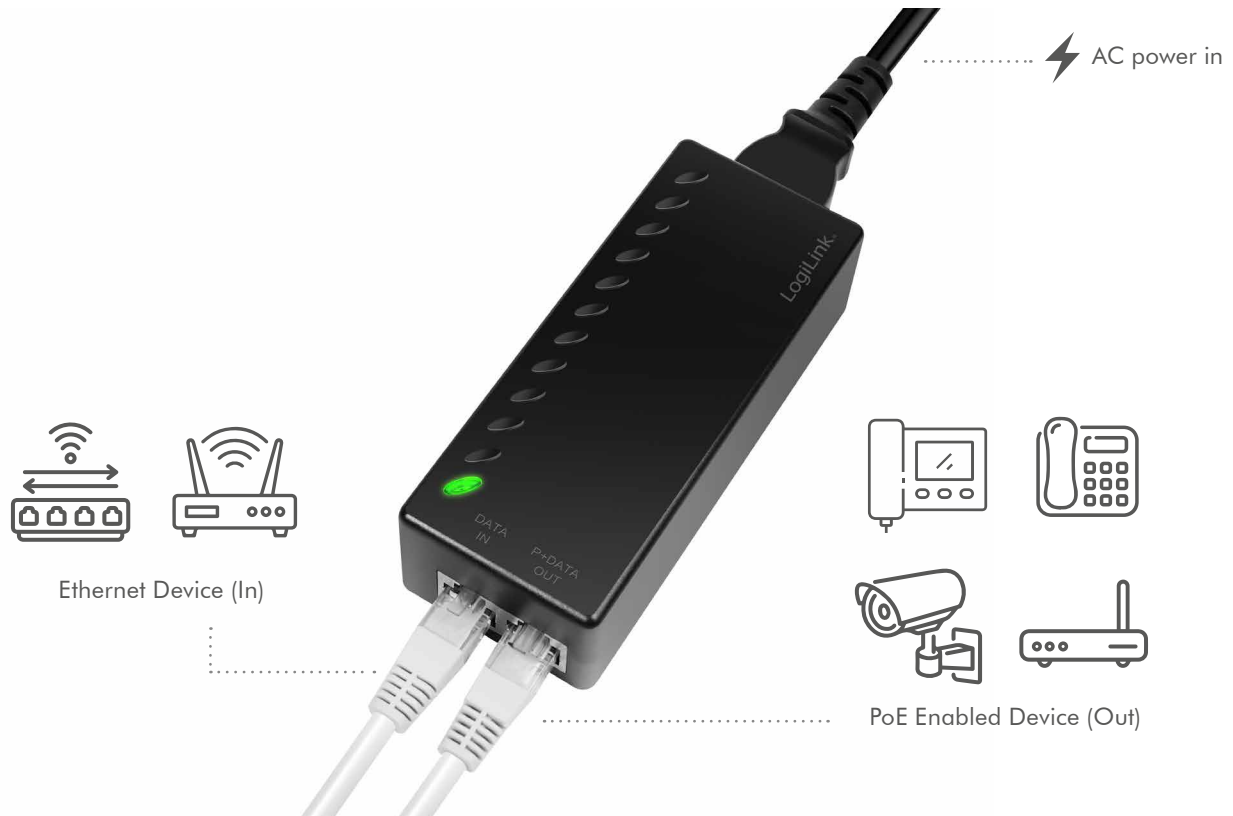Up to 30 W power/data connection to a Gigabit PoE device over standard ethernet cable.

Features:
» Connect your PoE-enabled network device to a non-PoE LAN switch
   port with full duplex Gigabit speed
» Automatically detects PoE terminals and supplies inline power
» Supports IEEE 802.3af/at PoE standard
» Ports: one 10/100/1000/10 G BASE-T data and one
   10/100/1000/10 G BASE-T PoE (data + power combined channel)
» Safe with multiple protections
» Supplies power up to 25.5 W (Max. 30 W)
» Plug & play, no driver installation required

Specification:

Solution	IP802AR
Standard	IEEE802.3 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3ab 1000BASE-T IEEE802.3an 10 G BASE-T IEEE802.3af IEEE802.3at Type 2
Input	230 V AC 50/60 Hz 0.5 A
Voltage Range (at PSE)	54 V
Power Available (at PD)	25.5 W (30 W max.)
Power Pin Assignment	3/6 (+), 1/2 (-)
LED Indicator	Green LED: AC power input; Red LED: Power+Data output
Working Distance	Up to 100 m
Protections	Over-current, over-voltage, overload and anti-interference
Housing Material	ABS
Operating Temperature	-10–40°C
Operating Humidity	10–90% RH (non-condensing)

Color	Black
Dimensions	12 x 4.9 x 3.5 cm
Weight	318 g
Cable Length	1.5 m

⚡ AC power in

LogiLink

DATA IN   P+DATA OUT

Ethernet Device (In)

PoE Enabled Device (Out)

Package Contents:
» 1x PoE+ Injector
» 1x Power Cable
» 1x User Manual

Package Information:
» Packing Dimension: 170 x 80 x 80 mm
» Packing Weight: 0.32 kg
» Carton Dimension: mm
» Carton Q'ty: pcs
» Carton Weight: kg

802.3at PoE+

802.3af PoE

POE004   v.4

4 052792 035223

Made in China

CE UK CA